


Description

ASP 750 ALUMINIUM BEAM RANGE

A new range of aluminium beams has been introduced by ASP, offering compatibility with other 750mm beams on the market. ASP 750 fits directly with all beams with 702mm chord centres and 40/80mm spigot hole spacing (eg Diamond beam and X-beam). Conversion spigots are also available to allow fitment to the Layher 750 beam.

The beam follows ASP's proven and successful layout, featuring 48.3mm uprights at 1m centres and node separation to allow fitment of couplers between bracings.

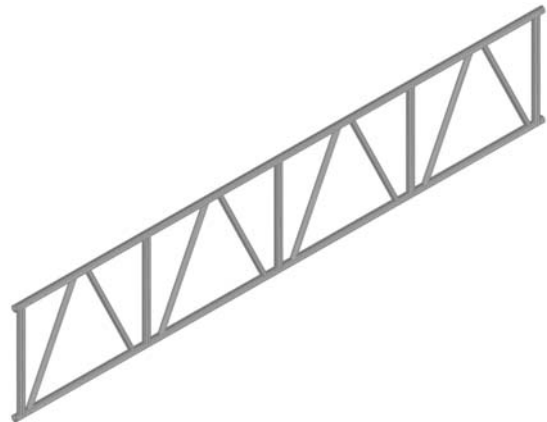

Range and Distributor Net Pricing

Code	Description	Weight	Net Price	SPECIAL INTRO PRICE
20092000	ASP 750 beam 2.0m	11.5kg	£71.00	
20093000	ASP 750 beam 3.0m	17.2kg	£103.50	£90.00
20094000	ASP 750 beam 4.0m	22.9kg	£134.00	£120.00
20095000	ASP 750 beam 5.0m	28.7kg	£162.50	
20096000	ASP 750 beam 6.0m	34.3kg	£189.00	
19080001	Alloy Beam spigot	00.3kg	£5.50	
30091260	Quick release pin M12x60	00.07kg	£0.47	
30081263	Special Bolt and Locknut M12x60	00.09kg	£0.33	

Safe Working Loads

Maximum Moment 33.6kNm Maximum Shear 30.7kN

Top chord restraint at 1.0m centres, see safe load table for details

Stocking policy

3m and 4m beams are in stock, quantity 60 and 80 units respectively. **These are available at a special introductory price - see above.** (Subject to prior sale)
Further stocks can be delivered within 2 to 3 weeks of order.

Fully tested

ASP 750 beam test data available on request

Connectors



Spigot



Q/R Pin



Special Bolt/Nut